



# HPP-10

Solar Foundation Solutions

## Hydraulic Power Pack



The diesel powered Hydraulic Power Pack is designed for work in the harsh outdoor environments found on many ground mounted solar installation projects where heat, dirt and the handling of highly flammable gasoline are problems.

SFS wants to partner with our customers to insure efficiency, reliability, safety and success in the field. We will work with you to reduce costs and maximum returns.

### FEATURES

- Powers 2 hydraulic guns simultaneously from a single power pack.
- Large 4 gallon diesel tank keeps you running all day without refueling.
- Large 196 square inch hydraulic oil cooler keeps hydraulic oil and tools cooler.
- An onboard Logic Controller monitors engine hours and notifies workers when engine oil change is required.
- Open frame design for ease of maintenance and serviceability.
- Excellent hydraulic oil filtration with filter monitor.

Website: [www.solarfoundations.com](http://www.solarfoundations.com)



**SFS**

Solar Foundation Solutions

Sales: Greg Rajala 408-674-4474 [greg@solarfoundations.com](mailto:greg@solarfoundations.com)

Technical Support: Mark Spilker 925-570-5259 [mark@solarfoundations.com](mailto:mark@solarfoundations.com)

# HPP-10 Hydraulic Power Pack




## Diesel 9.5 Horsepower Kubota Engine

The diesel-powered Kubota engine puts safety and efficiency first and guards against potential highly flammable gasoline accidents.



## Dual-Gun Capability

With the ability to accommodate two Hydraulic Rivet and/or Swage Guns at the same time, the speed of installation is vastly improved.

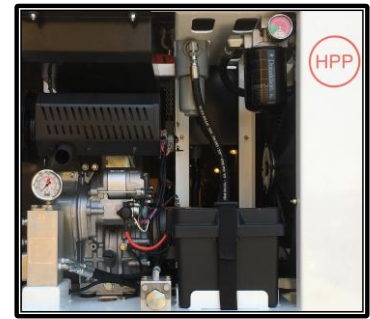

## Hydraulic Oil Cooler with Protected Battery

A large 196 square inch hydraulic oil cooler keeps hydraulic tools and power pack running cooler.

## Specifications

GUN CAPACITY	Powers 2 Hydraulic Rivet or Swage Guns at the same time
ENGINE	Kubota 9.5 HP Diesel Engine with an electric start
HYDRAULIC OUTPUT	21.5 Liter per minute (5.5 gpm) Hydraulic Pump
COOLING SYSTEM	196 square inch Oil Cooler
OPERATING PRESSURE	4,800 PSI Standard Pressure Setting – 5,800 Maximum
FUEL CAPACITY	4 gallon Diesel tank
SPEED	13 mm Blind Rivet breaks in 2 seconds
DRY WEIGHT	Designed to Fit most UTV's - 410 Pound Dry Weight
DIMENSIONS	26" wide – 32" long – 33" high

## Accessories and Service

- Hose Sets with Protective Cover  
8 Meter and 11 Meter Lengths are standard  
Custom Lengths Available
- Hose Hangers Available – Bolt On
- Onsite Training
- Phone and Video Support Available
- Rapid Response Parts and Service



**SFS**

Solar Foundation Solutions

Website: [www.solarfoundations.com](http://www.solarfoundations.com)

Sales: Greg Rajala 408-674-4474 [greg@solarfoundations.com](mailto:greg@solarfoundations.com)

Technical Support: Mark Spilker 925-570-5259 [mark@solarfoundations.com](mailto:mark@solarfoundations.com)